

Intelligent home guard Ip camera



YYP2P

Optimized version



Yoosee

Light version




Quick installation guide
V1.0


Mobile APP Operation Manual

I 、 Two ways to download YYP2P /Yoosee APP on mobile :

1.For IOS :

Search YYP2P /Yoosee on Apple  , download and install .
Open www.yyp2p.cn or www.yoosee.co ,download IOS app .
Use QQ , Baidu ,UC browser to scan QR Code of packing box .

2.For Android :

Search YYP2P /Yoosee on  , download and install .
Open www.yyp2p.cn or www.yoosee.co ,download android app .
Use QQ , Baidu ,UC browser to scan QR Code of packing box .

II 、 Account register

1. Open the YYP2P or YOOSEE software.
2. Click the register button (Figure 1) .
3. Select"Mobile or e-mail" (for example: if select mobile, enter your phone number then click next step, waiting for the SMS security code, then type in it, click next, then finish register and log in.)



Figure 1

III 、 Device plug in (Take the Android version for example)

- 1.Put camera and mobile near wireless router,make sure wifi signal is good ,open the wifi in you mobile and connect wireless router.(Note:not support 5G)
- 2.Power on ,waiting for 30seconds until hear "du-du-du"sound
Tip:If you didn't hear the voice ,use pin to insert the device RESET hole, press and hold for 5 seconds to hear the sword sound.After waiting 30 seconds ,you will hear "du-du-du"sound .
- 3.After downloading and register,please login your YYP2P or YOOSEE in mobile(Figure 2).
4. .Click the top right corner "+"in the device list ,enter the next step

 Download
Add new device

 Add manually
Add connected device

 Scan
Scan the QR Code to add NVR device (only some model support)



Figure 2

5. Click "Add New Device",enter the next step
6. Connection ,choose "AP Connection"

①Choose "AP Connection",enter the next step

②Following tips,until hear the "du-du-du"sound from the device,click "hear the connect voice",enter the nest step(Figure 3)

Choose the wireless router name which the phone had connected (Note: not support 5G)
input the wifi password
Establish the device new password

③Click"next" (Android)



Figure 3

Choose the device which need to configure network,waiting until hear "deng" sound,it means the device is connecting wifi router,whenconnection success,it will automatically enter in device list .(Note:If connection fail delice will put off "du-du-du" sound again,maybe the device is farauay from wifirouter of input wrong password .)



Figure 4



Figure 5

IOS

a. as the picture show(Figure 7)

b. Click "set the WiFi"(Figure 8)

c. Choose AP hot device "startwith :GM_AP*****" (Figure 9)

d. Click the top left corner" back to YYP2P" ◀Back to YYP2P" (Figure 10)



Figure 7



Figure 8



Figure 9






Figure 10




e. Wait the device configure wifi it put off "deng" sound, it means the device is connecting to wifi router, if connection succeeded, it will enter to device list. (Note: if connection fail or hear "du-du-du" sound again, prove the device is far away wireless router or the WiFi password is wrong.)

7. Smart link, Wired connection, please following the note and operate

-  Only add the device with pick-up, if without can't use this function
-  Add local online device

V, Equipment preparation

1. In the equipment list of the equipment Definition function icon (Figure 12)

-  Equipment parameter settings
-  Remote playback
-  Equipment parameter settings














Figure 12

2. Click in the equipment list of the equipment icon, you can see the preview video In the preview icon to define the interface

-  Preset a set
-  Return
-  Equipment parameter settings
-  Preview quality
-  Monitor
-  Equipment parameter settings
-  Full screen
-  Local video
-  Intercom
-  Screenshot




Figure 13

VI. AP Pattern

① Waiting 5 minutes in the distribution network patten , it will enter AP pattern automaticly

②Open "Set",choose WLAN,find the device WiFi name and choose device name which will connect,it will connect AP patter automaticly (WiFi name at the begining of GW AP)

③ XXXXXXXXXXXXXXXXXXXXXXXX



Figure 14



Figure 15



Figure 16

④ Open the download APP software ,YYP2P/YOOSSEE,and loading

⑤Click the Set of the device list to distributing network or AP connect directly



Figure 17



Figure 18






Figure 20



Click "Skip, to stand-alone patter"

Click "Sure"to AP preview video by connecting directly

VI AP mode

Logo describe:  AP mode device list  Device list

 Alarm record, local snap record, local video record

 Other APP setting  More products




Figure 21

Computer Client Operating Guide

一、CMS download

Serve the website <http://www.yyp2p.cn> or <http://yoosee.co> ((Figure 22))

click  and download it





Figure 22

二、CMS account log in

1. There are two way for option, one is"remote loading" use the APP YYP2P or YOOSEE registered account and password to log in, no need to register again.
2. The other is"local loading", account: admin password: 00000000 (8*0)

三、CMS add the device

1.Add the local device

Click the  button in the CMS left side, would automatic search the local device, select it then click this  to the right device list, then lick "Exit"(Figure 23).

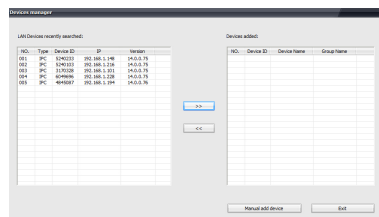


Figure 23

2. Settings




Figure 24

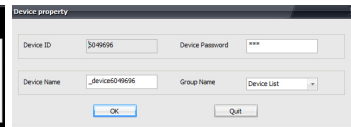


Figure 25

Close the picture preview, right click the device and select "Setting", then type in the password (initial password: 123) click "Ok", select "Delete" is to delete the device, select "Start monitor" is for video preview, select "Standard definition" is for resolution option, select "Set IPC" is for device settings. ((Figure 24,25,26)

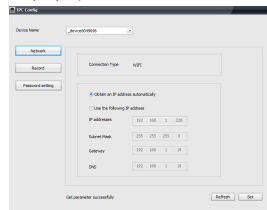


Figure 26

3. Add remote device

Click "Manual adding" type the device ID, password, name, select the device group, click "Ok" then click "Quit" like the follow. ((Figure 27)

Note: Fill in the alter password, if no change, fill in the initial one: 123

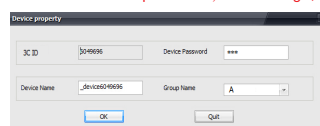


Figure 27

















Figure 28

4. CMS video preview


To preview all the device in the list, click the device list" **Device List** " and right click it, select" All connect "then it would play all the device in the list, If you want to open one device, double click it then it would display the video. ((Figure 28)

5. Feature describe

 Add device
  Video preview
  Play back
  Record
 Settings
  Screen lock
  PTZ control
  Voice
 PTZ panel control
  Preview advanced
  Preview next
  Full screen display
 Window display select

四、CMS video record setting

1. CMS local video storage setting

Click this logo"  ", set the storage way and video function (Figure 29)




Figure 29






Figure 30

2. Manual record setting

Click the device list" **Device List** " , right click it and select" All start record" then all the device would take video record there, if you want to select on device, right click it and select" Start record". (Figure 30)

3. Play back

Click the button"  " and enter the play back menu, select the record file type and pull in the list"  ", select it and enter the play site (Figure 31, 32)

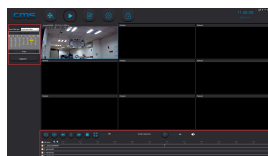


Figure 30

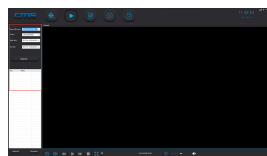


Figure 32