


2MP SONY323 Audio SD card Outdoor IR Bullet PoE IP Camera
 Model NO.: MEGA 21 X

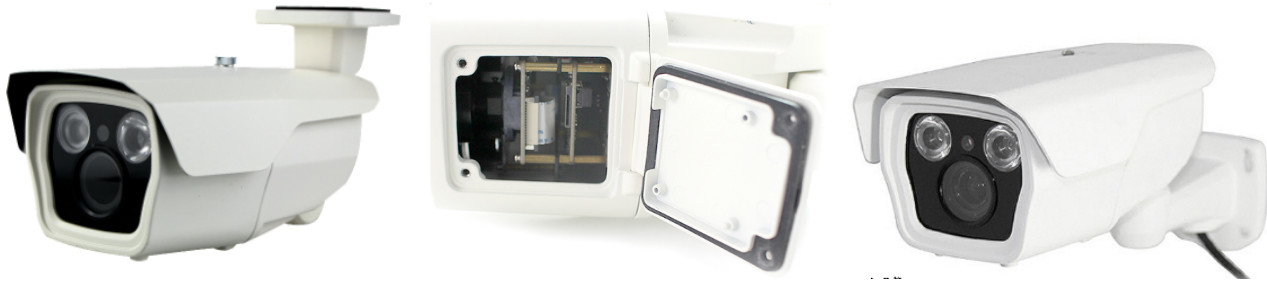

Funzioni Chiave:

- > 1/2.9" SONY IMX323 low illumination CMOS Sensor
- > H.265/H.264/H.264+ dual-stream encoding
- > 25fps@2MP 1920*1080; 12fps@3MP 2048*1536
- > 2.8-12mm 3MP Manual Varifocal lens
- > 2pcs Array IR Led, 35-50m IR distance
- > DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC,Defog, Max.128GB SD card slot
- > Support ONVIF 2.4 or above
- > DC 12V/PoE, IP66 Waterproof
- > Multiple network monitoring: Web viewer, CMS, NVR, XMeye(Smart phone App)
- > Support for mobile video surveillance(iOS,android);
- > Support cloud service, network penetration, alarm information pushed to phone, etc.

Parametri

Model NO.	MEGA 21 X
Camera	
Image Sensor	1/2.9" 2Mp SONY IMX323 Progressive CMOS
DSP	Hi3516CV300
Effective Pixels	2MP 1920*1080@25(30)fps; 3MP 2048*1536@12fps
TV System	PAL/NTSC
Electronic Shutter	1/50(1/60)s to 1/10,000s
Mini. Illumination	color 0.01Lux@F1.2, B/W 0.001Lux@F1.2
S/N	>50dB
DNR	2D/3D DNR
BLC	BLC
WDR	Digital WDR
Defog	Defog
Motion detection	Off/on (4 zone, rectangle)
Others	Gain control, digital defog, mirror, privacy masking,
Image config	Saturation/brightness/contrast/sharpness,mirror,3DNR ,white balance,flicker control
Lens & IR Distance	
Lens	2.8-12mm 3MP Manual Vari-focal lens
Day/Night	IR-cut filter with auto switch (ICR)
IR Distance	2pcs Array IR Led, 35-50m IR distance

IR Control	Auto/manual
IR Status	Under 10 Lux by CDS
IR Power On	CDS Auto Control
Compression	
Audio	G.711
Audio bitrate	64Kbps
Video	H.265+/H.265/H.264+/H.264 AVI
Main Stream	2MP 1920*1080@25(30)fps; 3MP 2048*1536@12fps
Sub Stream	704*576@25fps; 640*480@25fps
Bit Rate	0.1M~10Mbps variable;1~30f/s variable, CBR/VBR
Intelligent	
Intelligence	Alarm line,alarm region,goods stranded,video block,fuzzy detection,scene change
Network	
Ethernet	1 RJ45 Ethernet port, 10/100M adaptive
Protocol	RTSP/FTP/PPPOE/DHCP/DDNS/NTP/UPnP etc
Onvif	2.4 or above
WiFi protocol	802.11b/g/n, WEP, WPA, WPA2 encryption protocol
Data storage	Video,Image Files
Storage system	Manual,automatic(cycle, timing, alarm switch, motion detection)
Remote view	Support IE6.0 & above version(built-in web server)
Max.user access	Multiple users
Smart Phone	Support multiple mobile monitoring (iOS, Android)
Video Delay	0.3S (Within the Lan)
P2P/cloud	Yes /QR code
Other functions	Support OSD,live video transmission,motion detect and IO alarm,front-end storage/playback/download, and center reminder and image linkage,support JPEG capture; united remote client monitoring software,MYEYE;perfect SDK;
Interface	
Audio in	1ch input, level:2Vp-p,impedance:1kΩ,support sound pick-up input; 1ch output,impedance:16Ω,30mw,support microphone
On-board Storage	SD card slot max. Support 128GB
General	
Power supply	DC12V 2A / PoE built-in
Consumption	<12.95W
Operate conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH
Ingress protection	IP66
Casing	Metal
Dimensions	270mm(L)x107.4(W)mm×148(H)mm
Weight(kg)	1.5kg

Dimension: Unit(mm)

