

8032MPX




Features :

- 8ch5M/16ch4M/32ch1080P video input;
- HDMI/VGA simultaneous video output;
- 1.5U Case, 4SATA(Up to 6TB);
- H.264
- 1*10/100/1000Mbps auto-sensing Ethernet port, RJ45 port ;
- Automatic networking support, a key to add equipment;
- Support the Onvif protocol;
- Support GB28181 (Optional);
- Cloud services, P2P, alarm information push to phone;
- Support remote access, support ARSP;
- "Support DHCP, FTP, DNS, DDNS, NTP, UPNP, EMAIL,
- 3G, WIFI, IP search, Alarm center, etc ;"
- Mobile phone remote monitoring (iOS, Android);
- Multi browser access (IE, Chrome, Firefox, Safari);
- Support for more than twenty languages;
- Perfect protection circuit, unique triple watchdog function;
- Support WEB, CMS, VMS, MYEYE Platform;

Model :

8032MPX

Interface :

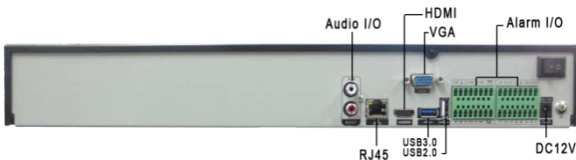

Parameters :

	Model	8032MPX
System	processor	Hi3536
	system	Embedded Linux
Video	Video input	8ch5M/16ch4M/32ch1080P
	Playback	2ch5M/4ch4M/4ch1080P
	Decode	H.264
Audio	Compression	G.711a
	Intercom	Support
Management	Record mode	Manual>Alarm>Motiondetection>Timing
	Inquire mode	Inquire by Time/Calendar/Event/Channel
	Storage mode	HDD Storage, Network Storage
	Backup	Network, USB, SATA
Interface	HDMI output	1*HDMI
	VGA output	1*VGA
	Ethernet port	1*RJ45 1*10/100/1000Mbps Ethernet port,
	POE ports	N/A
	Audio I/O	1/1
	Alarm I/O	16/4
	USB Port	2*USB2.0 ports, 1*USB3.0 ports
	HDD	4*SATA interface (Up to 6TB)
General	Temperature	0 °C - + 55 °C
	Humidity	10% -90% RH
	Power supply	12V/6A
	Consumption	<10W (Without HDD)
	Weight	Around 1.6KG
	Dimension	440L)* 400.5mm(W)* 60mm(H)